



BuzziSkin

Product Specification Sheet

This document contains technical information about the BuzziSkin



www.buzzi.space




Felt with self-adhesive backing


What would your perfect wall be like? Cuddly and sound absorbing? A surface you can pin photos to? Available in striking colors and easy to install? Environmentally friendly? Now you can have all these things at once! BuzziSkin has everything it takes to improve any interior at home or at work. It is available on handy, self-adhesive rolls.


Design by Sas Adriaenssens

General


 BuzziSkin

 Front: BuzziSkin
Back: Self-adhesive

 Roll: 10 m x 0,98 m | 393.70" x 38.58"
Thickness: 6 mm + 0,1 mm self-adhesive | 0.24" + 0.04" self-adhesive

 1 Roll: 11 kg | 24.25 lbs
1000g/sqm | 29.49 oz/sqyd

We do not recommend installing BuzziSkin on the ceiling or the floor or any glass surfaces. BuzziSkin is not suitable as a seating surface because it will become fluffy.

-  Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.
BuzziSkin can not be applied on vinyl or any other plasticized surface.
No claims concerning deviation in color, size, and thickness can be accepted.
This can vary depending on the nature of the product. The risk is more likely in different batches.

Certifications



Acoustics



Absorption



Mid tone



High tone

Content

Configurations	3
Fabrics	4
Dimensions	5
Acoustics	6

Configuration

BuzziSkin



Front: BuzziSkin
Back: Self-adhesive

Roll: L: 10 m W 0,98 m | L 393.70" W 38.58"



Thickness: 6 mm + 0,1 mm self-adhesive
0.24" + 0.04" self-adhesive



1 Roll: 11 kg | 24.25 lbs
1000g/sqm | 29.49 oz/sqyd

We do not recommend installing BuzziSkin on the ceiling or the floor or any glass surfaces. BuzziSkin is not suitable as a seating surface because it will become fluffy.

Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.



BuzziSkin can not be applied on vinyl or any other plasticized surface.

No claims concerning deviation in color, size, and thickness can be accepted.

This can vary depending on the nature of the product. The risk is more likely in different batches.



Fabrics

Skin


Composition 100% Recycled P.E.T. Felt, selfadhesive backing

Weight 1 Roll: 11 kg | 24.25 lbs
1000g/sqm | 29.49 oz/sqyd


Abrasion resistance >7.000 Martindale

Flammability EU: EN 13501.1:2013 Class C-s2,d0
USA: ASTM E84 Class A certified

Fastness to light USA 5




SK-Jeans 75



SK-StoneGrey 67



SK-LightBlue 60



SK-Curry 61




SK-OffWhite 63



SK-Mokka 74



SK-EcoBrown 58




SK-Lime 64




SK-Pink 65



SK-Orange 66




SK-Red 59



SK-Anthracite 68

Dimensions


Length: 10m | 393.70"
Thickness: 6 mm | 0.24"

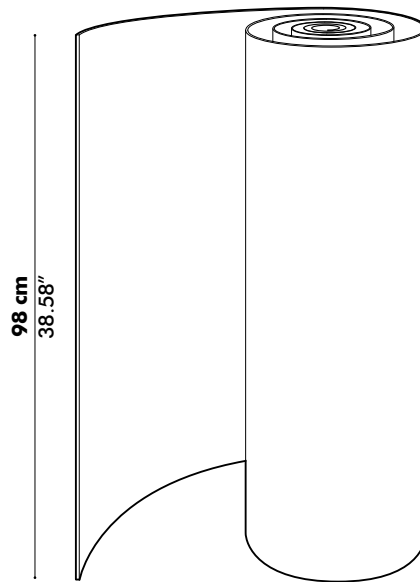

Acoustics

BuzziSkin

Absorption coefficient

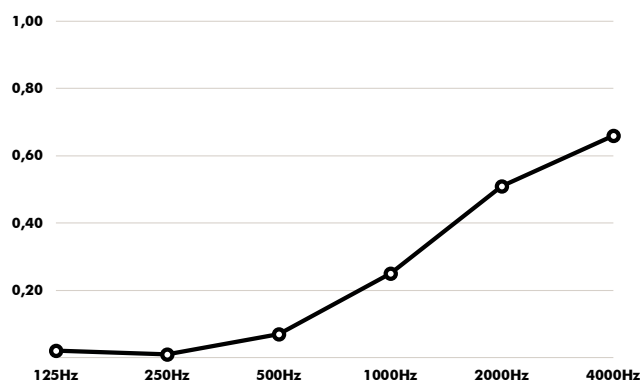

Hz	α^s
125	0.02
250	0.01
500	0.07
1000	0.25
2000	0.51
4000	0.66

Absorption Values

α_w (ISO 11654) **0.15**

NRC (ASTM - C423) **0.20**

SAA (ASTM-C423) **0.21**

Glossary

All calculations are based on accredited lab measurements, official document available on Buzzi.Space

Definitions

α	Weighted absorption coefficient	(ISO 11654)
NRC	Noise reduction coefficient	(ASTM - C423)
SAA	Sound absorption average	(ASTM - C423)

Classification of sound absorbers NEN-EN-ISO 11654

- A** 0.90 | 0.95 | 1.0
- B** 0.80 | 0.85
- C** 0.60 | 0.65 | 0.70 | 0.75
- D** 0.03 | 0.55
- E** 0.15 | 0.25